

## Siemens BACnet Programmable TEC Dual Duct Two Air Velocity Sensors Controller



The Siemens BACnet PTEC Dual Duct Controller provides high performance Direct Digital Control (DDC) technology for room temperature control in Dual Duct Variable Air Volume (VAV) systems or air volume setpoints and room temperature control in Constant Volume (CV) systems. The DDC and related components provide a totally electronic control system. The DDC can operate independently, stand-alone or networked to perform complex HVAC control, monitoring and energy management functions. This controller is designed to reside on any BACnet control system.

### Features

- Communicates using BACnet MS/TP protocol for open communications on BACnet MS/TP networks.
- BTL listed as a B-ASC device.
- Programmable using PPCL.
- Setpoints and control parameters assigned and changed locally or remotely.
- Setpoints and control parameters stored in Electrically Erasable Programmable Read Only Memory (EEPROM)—no battery backup required.

- Returns from power failure without operator intervention.
- Meets low duct static pressure requirements
- PID control of HVAC systems to minimize offset and maintain tighter setpoint control.
- Unique control algorithms for specific applications.
- No calibration required, thereby reducing maintenance costs.
- Separate minimum and maximum air volume setting for heating and cooling modes.
- Separate air volume setpoints for occupied and unoccupied modes (CV Application only).

### Applications

- Constant Volume – Two Inlet Sensors with Optional Reheat (Application 6565)
- Constant Volume – One Inlet and One Outlet Sensor with Optional Reheat (Application 6566)
- Variable Air Volume – Two Inlet Sensors with Optional Reheat (Application 6567)
- Variable Air Volume – One Inlet and One Outlet Sensor with Optional Reheat (Application 6568)
- Variable Air Volume with Changeover (Application 6569)

If required, new custom code using our PPCL programming language can be added to replace or supplement the standard application residing in the controller. This provides the flexibility to meet many job specifications with the assurance of having a proven and tested standard application to rely upon.

# Hardware

## Controller Board

The Siemens BACnet PTEC Dual Duct Controller consists of an electronic controller assembly and on-board differential pressure transducer(s).

This controller provides all wiring terminations for system and local communication and power. The cable from the room sensor (purchased separately) connects to an RJ-11 jack on the controller. All other connections are removable terminal blocks. The controller assembly is mounted on a plastic track that mounts directly on the terminal box. An optional enclosure (P/N 550-002) protects the controller assembly.

Autozero Modules are available for mounting on the controller for those applications where uninterrupted airflow is necessary. A Pneumatic Transducer provides control of pneumatic damper and valve actuators.

The controller interfaces with the following external devices:

- Averaging air velocity sensors provided by VAV terminal unit manufacturers
- Floating control valve and damper actuators
- Temperature sensors (room, duct, immersion, and outside air)
- Service and commissioning tools
- Digital input devices (dry contacts from motion sensors, alarm contacts)
- Digital output devices (fan, stages of electric heat)

## Room Sensor

The room sensor connection to the controller board consists of a quick-connect RJ-11 jack. This streamlines installation and reduces controller start-up time.

## Combination Temperature and Relative Humidity Models

The Series 2200 range of TEC room units includes combination temperature and humidity models. For these models, both temperature and relative humidity values are passed digitally to the TEC. This information is passed from the room unit through the RJ-11 cable to the RTS port on the TEC. See the *Series 2200 Temperature Room Units for TEC and ATEC Technical Specification Sheet* (149-820), for more information.

# Dual Duct 2 AVS Controller Specifications

Dimensions	4-1/8" W × 11-1/4" L × 1-1/2" H
Weight	approx. 3 lbs (1.35 kg)
Controlled Temperature Accuracy, Heating or Cooling	±1.5°F (0.9°C)

Power Requirements	
Operating Range	19.2 to 27.6 Vac, 50 or 60 Hz
Power Consumption	10 VA (plus 12 VA per DO)

Inputs	
Analog	1 room temperature sensor 2 velocity sensors 1 setpoint (optional) 1 auxiliary temperature sensor 2 selectable 0-10 Vdc/4-20 mA
Digital	3 dry contacts

Outputs	
Analog	3 0-10 Vdc
Digital	8 DO 24 Vac optically isolated solid state switches @ 0.5 amp

Communications	
Remote	BACnet MS/TP (EIA 485), 9600 bps to 76800 bps FLN Trunk
Local	WCIS and PTEC Tool

Ambient Conditions	
Storage Temperature	-40°F to 167°F (-40°C to 75°C)
Operating Temperature	32°F to 122°F (0°C to 50°C)
Humidity Range	0% to 92% (non-condensing)

Agency Listings	
UL Listing	UL 916, PAZX
cUL Listed	Canadian Standards C22.2 No. 205-M1983, PAZX7
FCC Compliance	47 CFR Part 15

## Differential Pressure Sensor

The differential pressure sensor is easily connected to the box's air-velocity sensing elements to provide measurement of the differential pressure. The measured value is converted to actual airflow in cfm (lps) by the controller.

### Differential Pressure Sensor Specifications


Temperature Range	32°F to 122°F (0°C to 50°C)
Measurement Range	0 to 5200 fpm (0 to 26 m/s)

## Autozero Module

The optional Autozero Module (see Figure *Autozero Module*) is required when continuous operation at occupied flow is required for an area. The Autozero Module is connected to the air velocity inlet ports of the controller and provides periodic recalibration of the air velocity transducer without changing air volume being delivered to a room. This recalibration ensures long-term precise airflow delivery.

### Autozero Module Specifications

Power Consumption	.75 VA @ 24 Vac max.
Dimensions	2" W x 1.51" H x 1.89" D (58 mm x 78 mm x 29 mm)
Weight	1.3 oz. (36.9 g)

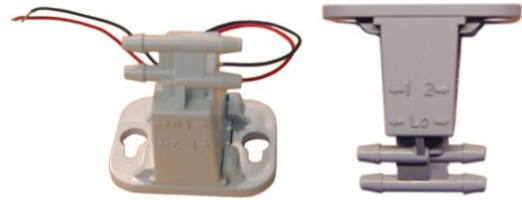

Autozero Module.

## Product Ordering Information

Description	Product Part Number
Siemens BACnet PTEC Dual Duct Controller	550-497P
Large enclosure for electronic controller without damper actuator (long board).	550-002

## Document Information

Technical Specification Sheets/Technical Instructions	Document Part Number
Room Temperature Sensors – Series 2200	149-820
Duct Temperature Sensor	149-134P25
Low Limit Detection Thermostat	155-016P25
Analog Sensors – 10 K Ohm Thermistor	149-912, 149-915, and 149-916
<i>Siemens Valves and Electronic Actuators</i>	
599 Series Zone Valves 2-Way, 3-Way Zone Valve Electric and Thermic Actuators	155-034
599 Series Zone Valves and Actuators – Modulating, On/Off Spring Return, 2-Position Control	155-063

# BACnet Protocol Implementation Conformance Statement

## Products

Product	Model Number	Protocol Revision	Software Revision	Firmware Revision
Siemens BACnet PTEC Dual Duct Controller	550-497P	Revision 4 (135-2004)	2.0.5.1	BD43

Date Tested: July 2011 – B-ASC

## Vendor Information

<p><b>Siemens Industry, Inc.</b>          Building Technologies Division          1000 Deerfield Parkway          Buffalo Grove, IL 60089  <a href="http://www.buildingtechnologies.siemens.com/bt/us">www.buildingtechnologies.siemens.com/bt/us</a></p>
---

## Product Description

<p>The controller is an integral part of Siemens controls system. The controller can operate stand-alone or can be networked to perform complex HVAC control, monitoring, and energy management functions. This controller communicates using BACnet MS/TP.</p>
---

## BACnet Standardized Device Profile

Product	Device Profile	Tested
PTEC	BACnet Application Specific Controller (B-ASC)	✓

## Supported BACnet Interoperability Building Block (BIBBs)

Product	BIBB	Name	Tested
PTEC	DS-RP-B	Data Sharing-ReadProperty-B	✓
	DS-RPM-B	Data Sharing-ReadPropertyMultiple-B	✓
	DS-WP-B	Data Sharing-WriteProperty-B	✓
	DM-DDB-B	Device Management-Dynamic Device Binding-B	✓
	DM-DOB-B	Device Management-Dynamic Object Binding-B	✓
	DM-DDC-B	Device Management-DeviceCommunicationControl-B	✓
	DM-RD-B	Device Management-ReinitializeDevice-B	✓
	DM-BR-B	Device Management-Backup and Restore-B	✓
	DM-OCD-B	Device Management-Object Creation and Deletion-B	✓

## Standard Object Types Supported

Product	Object Type	Creatable	Deletable
PTEC	Analog Input	No	No
	Analog Output	Yes	Yes
	Binary Input	No	No
	Binary Output	Yes	Yes
	Device	No	No
	File	Yes	Yes
	Program	Yes	Yes

## Data Link Layer Options

Product	Data Link and Options
BTEC	MS/TP master (Clause 9), baud rate(s): 9600 bps, 19200 bps, 38400 bps, 76800 bps
	MS/TP slave (Clause 9), baud rate(s): 9600 bps, 19200 bps, 38400 bps, 76800 bps

## Segmentation Capability

Product	Segmentation Type	Supported	Window Size: 32 (MS/TP product limited to 1)
BTEC	Able to transmit segmented messages	No	
	Able to receive segmented messages	No	

## Device Address Binding

Product	Static Device Binding Supported
BTEC	Yes

## Networking Options

Product	Static Device Binding Supported
BTEC	No

## Character Sets

Product	Character Sets Supported
BTEC	ANSI X3.4